


# Offshore sailing

**APPLICABLE PRODUCTS:** B951, B952, B953, B954

This is a general guide to show you how simple it is to install an em-trak AIS transceiver.


If you have any questions at any time you can contact our team [support@em-trak.com](mailto:support@em-trak.com)

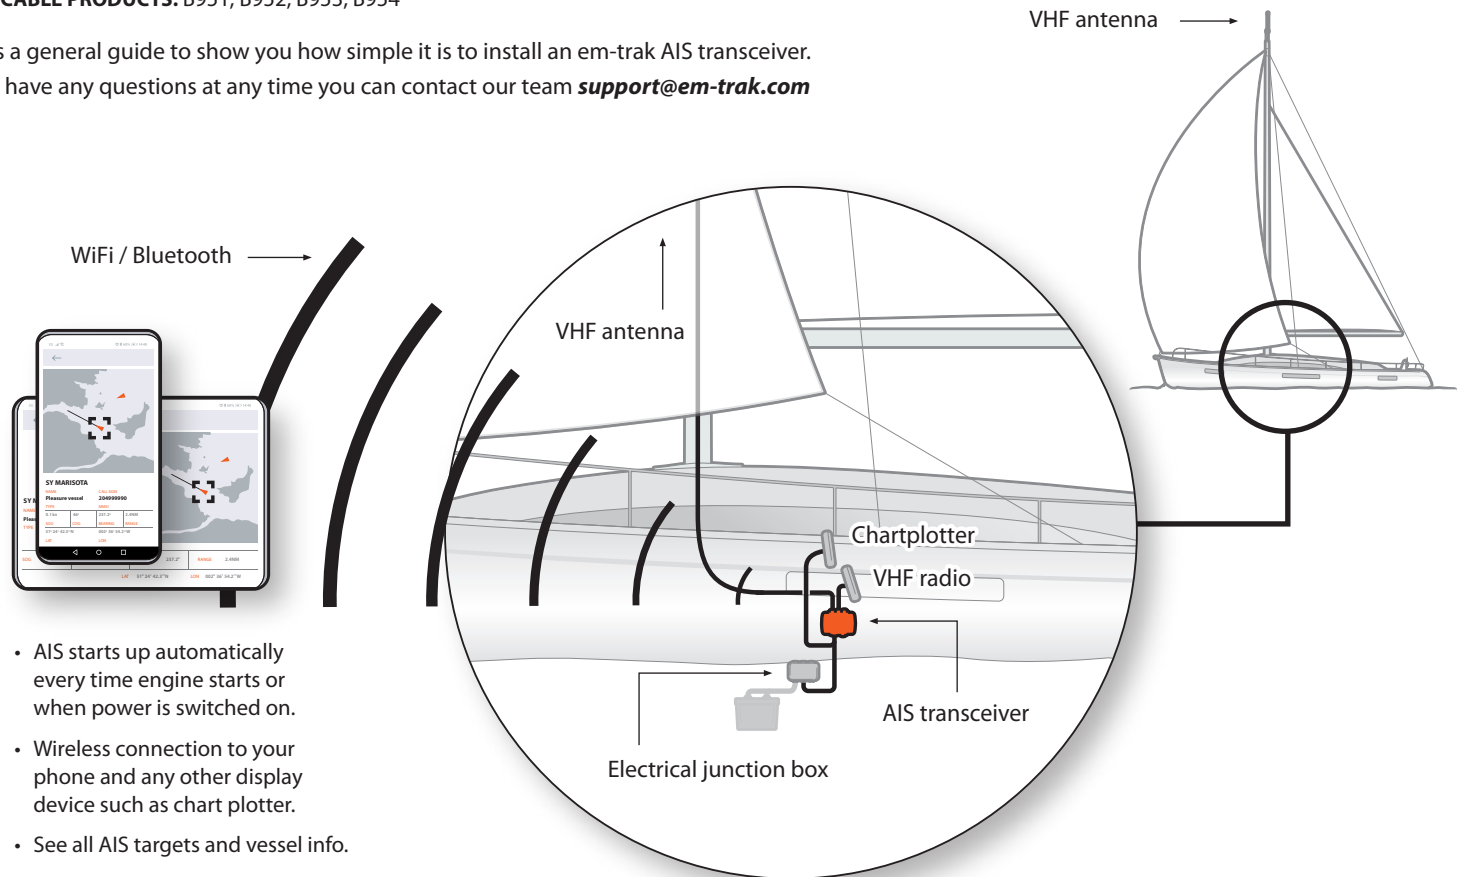

**1**

No screws required!


Use bracket to fit AIS into convenient storage / utility area.



**2**


Connect to your VHF radio, VHF antenna and power.

AIS has internal GPS antenna. Therefore an external GPS antenna is optional if AIS is installed directly under a thin deck or next to the window. If not possible an external GPS antenna will be required.

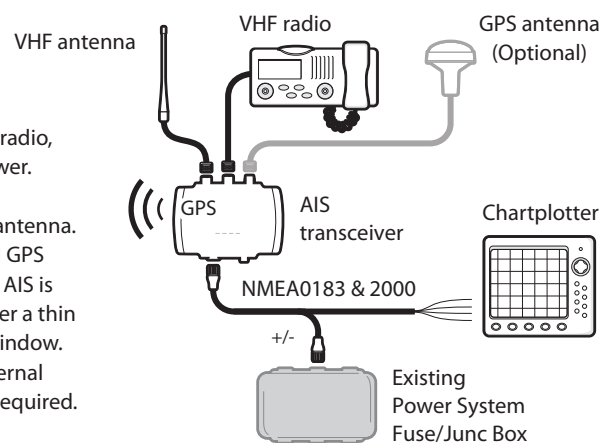

**3**

Switch power on and use **CONNECT-AIS** app or **PROAIS2** PC Software to program AIS with your vessel information.

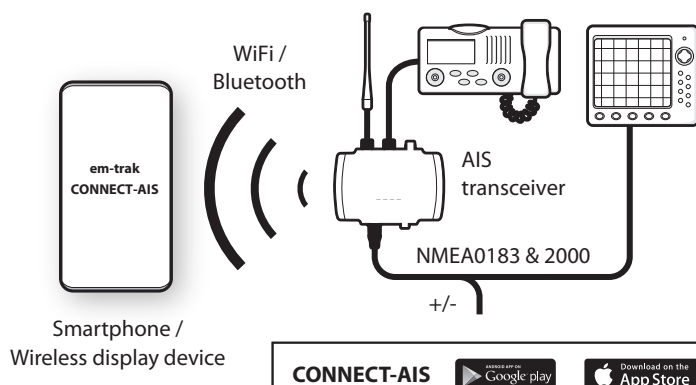

**4**

See AIS targets and information on your chartplotter, smart phone and other wireless devices.

